## **Technical Specifications**

## HP Z27q G3 QHD Display




Front

#### 1. Power button

### **Technical Specifications**

### HP Z27q G3 QHD Display

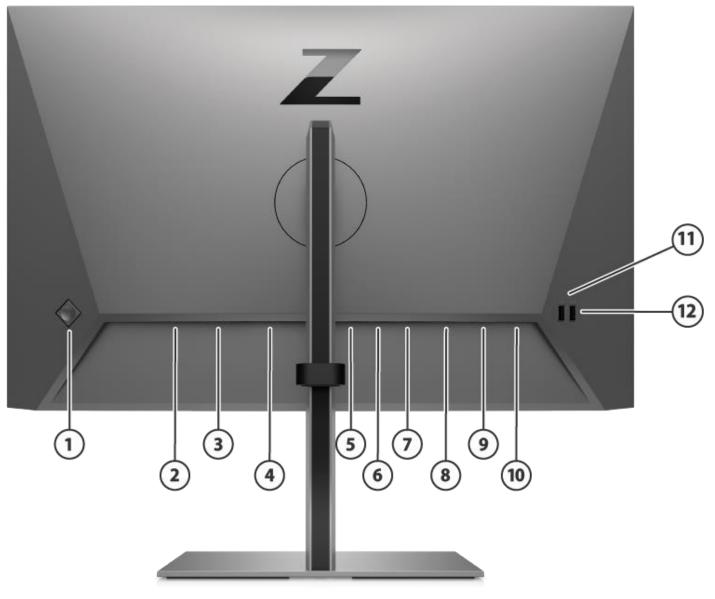

- 1. OSD control
- 2. Security cable slot
- 3. Master power switch
- 4. Power connector
- 5. HDMI port
- 6. DisplayPort<sup>™</sup> connector

### Back

- 7. DisplayPort<sup>™</sup> connector (out)
- 8. USB Type-B port (upstream)
- 9. USB port
- **10.** USB port (Battery charging 1.2, 7.5W)
- 11. USB Port
- 12. USB port (Battery charging 1.2, 7.5W)

## **Technical Specifications**

(hp)

	Maximum Resolution	2560 x 1440 @ 60HZ
	User-Assignable Function Buttons Native Resolution	Yes, 4 buttons QHD (2560 x 1440)
		Management, Information, Exit
	On Screen Controls	Brightness +, Color, Image, Input, Power, Menu,
	On Screen Display	Joystick
	Display Management Software	HP Display Center
	Low Blue Light Mode	Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution certified)
	Warranty (Number Of Years)	3/3/0 for LA, NA, EMEA, APJ; (3/3/3 in select APJ Countries)
	Detachable Stand	Yes
	Security Lock Ready	Standard Security Lock Slot
	VESA Mounting	100 mm x 100 mm (bracket included)
	Height Adjust Range	150mm
	Pivot	±90
	Swivel	±45°
	Tilt	-5 to +20°
•	Color	(Head) Turbo Silver; (Stand) Turbo Silver
Monitor Specifications	Bezel	4-sided Micro Edge
Color	sRGB P3 D65	99 % 85%
6.1	-	
	Default Color Temperature	sRGB
	RGB Channel Adjust	Yes, Gain
Color Management	Factory Color Calibrated Calibrated Color Presets	Yes (Delta E <=2) sRGB, BT.709, P3 D65 (Production after Feb '21)
	Manufacturers; Actual Performance May Vary E	Either Higher Or Lower.
		The Typical Specifications Provided By HP's Component
	Panel Active Area (W X H)	596.736(H)*335.664(V)
	Vertical Viewing Angle (Typical Cr>10)	178°
	Cr>10)	178°
	Horizontal Viewing Angle (Typical	
	naze Response Time (Typical)	25% 5ms GtG (with overdrive)
	Haroness Haze	25%
	Screen Treatment Hardness	Anti-glare 3H
	Backlight Type Screen Treatment	Edge-lit Anti-glare
	Brightness - In Hours) Backlight Type	
	Backlight Lamp Life Minimum (To Half Brightness, In Hours)	40k
	Pixels Per Inch (Ppi)	109 PPI
	Pixel Pitch	0.2331mm
	Flicker Free	Yes
	Dynamic Contrast Ratio	10M:1
	Contrast Ratio (Static)	1000:1
	Brightness (Typical)	350 nits
	Aspect Ratio	16:9
	Panel Bit Depth	8 bit
	Refresh Rate	60 Hz
	Panel Technology	IPS
Panel Specifications	Display Size (Diagonal)	27"

Technical Specifications

rechnical Specifical	10115	
	Preset Graphic Modes/Suppored	640 x 480@60Hz
	Resolutions	800 x 600@60Hz
	Resolutions	-
		1024 x 768@60HZ
		1280 x 720@60Hz
		1280 x 1024@60Hz
		1440 x 900@60Hz
		1600 x 900@60Hz
		1600 x 1200@60Hz
		1680 x 1050@60Hz
		1920 x 1080@60Hz
		1920 x 1200@60Hz
		2560 x 1440@60Hz
	High Definition Video Formats	720 x 480p@60Hz
		720 x 480i@60Hz
		1280 x 720p@60Hz
		720 x 576i@50Hz
		720 x 576p@50Hz
		1280 x 720p@50Hz
		1920 x 1080p@50Hz
		1920 x 1080p@60Hz
		1920 x 1080i@50Hz
		1920 x 1080i@60Hz
		640 x 480p@60Hz
	Minimum Vertical Scan Rate	50 Hz
	Maximum Vertical Scan Rate	60 Hz
	Minimum Horizontal Scan Rate	30.0 kHz
	Maximum Horizontal Scan Rate	90.0 kHz
	Maximum Pixel Clock	250 MHz
		10
	User Programmable Modes	
	Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
		Fortuguese, Japanese, 1-Chinese and 5-Chinese)
Connector Types	DisplayPort™	1 DisplayPort™ 1.4
	DisplayPort™ Out	1 DisplayPort™ 1.4 out
	HDMI	1 HDMI 2.0
	USB- A	4 USB-A 3.2 Gen1 (2 for battery charging 1.2, 7.5W)
	USB-B (Hub enablement)	1 USB-B
Special Features	Picture-in-Picture, Picture-by-Picture	Yes
	DaisyChain/DisplayPort Multi stream	Yes
	Transport (MST)	
	User Updateable Firmware	Yes
	•••••	
Power & Operating	Power Supply	Internal
Specs	Power Source	100 – 240 VAC 50/60 Hz
	Power Consumption- MAX	69 W
	Energy Saving/Stand By Mode	0.5 W
	Power Consumption- Typical	35 W
	Power Cable Length	1.9m
	-	
ENERGY STAR Data	Operational Mode at 100 VAC	18.36 W
	Operational Mode at 115 VAC	18.28 W
	Operational Mode at 230 VAC	18.34 W



### **Technical Specifications**

EU Energy Efficiency Class (ERP Lot–5)	On-mode Power Consumption	23 W	
Class (LKF LU(-3)	Annual Power Consumption Energy Efficiency Class	34 kWh F	
Operating Conditions	Operating Temperature - Celsius Operating Temperature - Fahrenheit Non-Operating Temperature - Celsius Non-Operating Temperature - Fahrenheit	5° – 35°C 41° – 95°F –34° – 60°C 29° – 140°F	
	Operating Humidity Non-Operating Humidity Operating Altitude Non-operating Altitude	20 – 80% Relative Humidity 5 – 95% 0 – 5,000 m (16,400 ft.) 0 – 12.192 m (40,000 ft.)	y (non-condensing)
Environmental Features and Certifications	Mercury-free LED display backlighting Arsenic-Free Display Glass Low Halogen Agency Approvals And Certifications	Yes, Mercury-free LED back Yes WW application CE,CB,KC/KCC/NOM/PSB/E& Low Blue Light/ BIS/cTUVu:	AC/GS/TUV-S/ISO 9241-307/
		Star/TCO/TCO Certified Edge/VCCI/FCC/BSMI/WEEE	
	Microsoft WHQL Certification	Win 11	
	ENERGY STAR <sup>®</sup> Certified	Yes	
	EPEAT® Registered	Yes	
	Regions need to verify by country	CEL Grade 1*	
	China Energy Label		ne 1st 2024 comply with China
	TCO Certified Edge	Yes	
	TCO Certified	Yes	
	SmartWay Transport Partnership - NA only	Yes (NA sku)	
Contains Recycled Plastics	<b>Contains Recycled Plastics</b>	81.40%	
	Recyclable Packaging (Box, packing materials)	100% recyclable packagin <u>c</u>	].
Unit Product/Package Specifications	<b>Product Dimensions</b> (Unpacked with stand) (W x D x H)	61.23 x 20.5x 53.04 cm	24.11x8.07 x 20.88 in
	Product Dimensions (Packed) (W x D x H)	69.8*42.3*16.3 cm	27.48 x 16.65 x 6.42 in
	<b>Display Head Dimensions</b> (Unpacked without stand) (W x D x H)	61.23x3.89x 35.61 cm	24.11x 1.53 x 14.02 in
	Base Area Footprint	246 x 205 mm	9.69 x 8.07 in
	(w x d mm)		
	Bezel Measurements - Metric Product Weight	Bottom Cover: 601.8mm	Bottom Cover: 23.69in
	(Unpacked with stand)	5.8 kg	12.8 lb
	Product Weight (Packed)	9.1 kg	19.8 lb
	(Packed) <b>Product Weight</b> (Head Only)	4.3 kg	9.48lb
What's in the box?	Documentation kit		



### **Technical Specifications**

DP1.4 Cable (1.8m) HDMI 2.0 cable (1.8m, Production after May'21) USB 3.0 Type A to B (1.8m) Power cable VESA Adapter Cable Holder

User Guide and Warranty Languages User Guide Languages

**Warranty Languages** 

English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.

English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.



## **Technical Specifications**

Copyright © 2024 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.

### Summary

Change Log				
January 12, 2021	V1 to V2	Update	Technical Specifications	
February 28, 2021	V2 to V3	Update	Energy Efficiency Class	
April 16, 2021	V3 to V4	Update	VESA Mounting Specs	
June 1, 2021	V4 to V5	Update	Color Management	
June 24, 2021	V5 to V6	Update	What's in the box? section	
March 22, 2023	V6 to V7	Update	VESA Mounting specs	
December 21, 2023	V7 to V8	Added	Windows 11	
May 17, 2024	V8 to V9	Remove	CEL and CECP	
May 30, 2024	V9 to V10	Added	CEL and disclaimer	