
## **OVERVIEW**



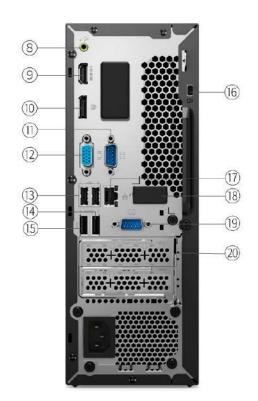

1. Powe	er button	11. Serial *
2. Card	reader *	12. VGA
3. Micro	ophone jack (3.5mm)	13. 2x USB 2.0
4. Head	phone / microphone combo jack (3.5mm)	14. 1x USB 3.2 Gen 1
5. USB-	-C 3.2 Gen 1 (data transfer, 15W charging)	15. 1x USB 3.2 Gen 1 (Smart Power On)
6. 2x US	SB 3.2 Gen 1	16. Kensington Security Slot
7. Optic	cal drive *	17. Ethernet (RJ-45)
8. Audi	o line-out (3.5mm)	18. Smart cable clip slots *
9. HDM	I 2.1 TMDS	19. Serial *
10. Displ	ayPort 1.4	20. Optional ports *

Notes:

• Items with \* are only available on selected models

## PERFORMANCE

### Processor

#### **Processor Family**

Intel® Celeron®, Intel® Pentium®, or 12th / 13th Generation Intel® Core™ i3 / i5 / i7 Processor

#### Processor\*\*

Processor Name	Cores   [hreads] Base Frequency		Base Frequency	Max Frequency	Cache	Processor Graphics
Celeron <sup>®</sup> G6900	2	2	3.4GHz	-	4MB	Intel® UHD Graphics 710
Pentium® Gold G7400	2	4	3.7GHz	-	6MB	Intel® UHD Graphics 710
Core i3-12100	4 (4 P-core + O E-core)	8	P-core 3.3GHz	P-core 4.3GHz <sup>[1]</sup>	12MB	Intel® UHD Graphics 730
Core i3-12300	4 (4 P-core + 0 E-core)	8	P-core 3.5GHz	P-core 4.4GHz <sup>[2]</sup>	12MB	Intel® UHD Graphics 730
Core i5-12400	6 (6 P-core + 0 E-core)	12	P-core 2.5GHz	P-core 4.4GHz <sup>[3]</sup>	18MB	Intel® UHD Graphics 730
Core i5-12500	6 (6 P-core + 0 E-core)	12	P-core 3.0GHz	P-core 4.6GHz <sup>[4]</sup>	18MB	Intel® UHD Graphics 770
Core i5-12600	6 (6 P-core + 0 E-core)	12	P-core 3.3GHz	P-core 4.8GHz <sup>[5]</sup>	18MB	Intel® UHD Graphics 770
Core i7-12700	12 (8 P-core + 4 E-core)	20	P-core 2.1GHz / E- core 1.6GHz	Max Turbo up to 4.9GHz / P-core 4.8GHz / E-core 3.6GHz <sup>[6]</sup>	25MB	Intel® UHD Graphics 770
Core i3-13100	4 (4 P-core + 0 E-core)	8	P-core 3.4GHz	P-core 4.5GHz <sup>[7]</sup>	12MB	Intel® UHD Graphics 730
Core i5-13400	10 (6 P-core + 4 E-core)	16	P-core 2.5GHz / E- core 1.8GHz	P-core 4.6GHz / E-core 3.3GHz <sup>[8]</sup>	20MB	Intel® UHD Graphics 730
Core i5-13500	14 (6 P-core + 8 E-core)	20	P-core 2.5GHz / E- core 1.8GHz	P-core 4.8GHz / E-core 3.5GHz <sup>[9]</sup>	24MB	Intel® UHD Graphics 770
Core i5-13600	14 (6 P-core + 8 E-core)	20	P-core 2.7GHz / E- core 2.0GHz	P-core 5.0GHz / E-core 3.7GHz <sup>[10]</sup>	24MB	Intel® UHD Graphics 770
Core i7-13700	16 (8 P-core + 8 E-core)	24	P-core 2.1GHz / E- core 1.5GHz	Max Turbo up to 5.2GHz / P-core 5.1GHz / E-core 4.1GHz <sup>[11]</sup>	30MB	Intel® UHD Graphics 770

Notes:

[1], [2], [3], [4], [5], [6], [7], [8], [9], [10], [11] Intel<sup>®</sup> Max Turbo frequency will vary depending on application workload and the hardware and software configurations, see http://www.intel.com/technology/turboboost/ for more information.

## Operating System

#### Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows<sup>®</sup> 11 Home Single Language
- Windows<sup>®</sup> 11 DG Windows<sup>®</sup> 10 Pro 64
- Ubuntu Linux<sup>[1]</sup>
- No preload operating system

Notes:

[1] Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, Human Presence Detection, etc.

## Graphics

#### Graphics

\*\*[1]

Graphics	Туре	Memory	Max Resolution	Connector	Key Features
Intel® UHD graphics 710	Integrated	Shared	3840×2160@60Hz(HDMI®), 1920x1200@60Hz(VGA), 4096x2304@60Hz(DP)	1x HDMI® 2.1 TMDS, 1x VGA, 1x DP 1.4 HBR2	DirectX® 12
Intel® UHD graphics 730	Integrated	Shared	3840×2160@60Hz(HDMI®), 1920x1200@60Hz(VGA), 4096x2304@60Hz(DP)	1x HDMI® 2.1 TMDS, 1x VGA, 1x DP 1.4 HBR2	DirectX® 12
Intel® UHD graphics 770	Integrated	Shared	3840×2160@60Hz(HDMI®), 1920x1200@60Hz(VGA), 4096x2304@60Hz(DP)	1x HDMI® 2.1 TMDS, 1x VGA, 1x DP 1.4 HBR2	DirectX® 12

Notes:

[1] The information of integrated graphics are not applicable for the models with processor which has no integrated graphics inside (for the details, please refer to processor section).

## **Monitor Support**

#### **Monitor Support**

Supports up to 3 independent displays via (HDMI®, DP and VGA)

## Chipset

#### Chipset

Intel<sup>®</sup> B660 chipset

#### Memory

Max Memory<sup>[1]</sup> Up to 64GB DDR4-3200

## Memory Slots

Two DDR4 UDIMM slots, dual-channel capable

#### Memory Type

DDR4-3200

Notes:

[1] The max memory is based on the test results with current Lenovo<sup>®</sup> memory offerings.

### Storage

#### Storage Support<sup>[1]</sup>

Up to two drives, 1x 3.5" HDD + 1x M.2 SSD • 3.5" HDD up to 2TB • M.2 SSD up to 1TB

#### Storage Type\*\*\*

Disk Type	Interface	RPM	Security
3.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	-	Opal
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	-	Opal 2.0

Notes:

[1] The max capacity of each disk type is based on the test results with current Lenovo<sup>®</sup> storage offerings.

### **Removable Storage**

#### **Optical**\*\*

- DVD-ROM, SATA 1.5Gb/s, slim (9.0mm)
- DVD burner (DVD±RW), SATA connector, slim (9.0mm)

• None

#### Card Reader

- 7-in-1 card reader (SD, SDHC, SDXC, MMC, MS, MS-Pro, XD)
- No card reader

### Multi-Media

#### Audio Chip

High Definition (HD) Audio, Realtek® ALC623-CG codec

#### Speakers

- No speakers
- Single speaker, 1W x1

## **Power Supply**

#### Power Supply\*\*

Power	Туре	Efficiency	Key Features
260W	Fixed	90%	Autosensing, 80 PLUS Gold qualified
180W	Fixed	85%	Autosensing

## DESIGN

### **Input Device**

#### Keyboard\*\*

- Lenovo<sup>®</sup> Calliope Keyboard (USB connector), black
- Lenovo® Traditional Keyboard (USB connector), black
- No keyboard

#### Mouse

- Lenovo<sup>®</sup> Calliope Mouse (USB connector), black
- No mouse

#### Mechanical

#### Form Factor

SFF (7.4L)

#### Dimensions (WxDxH)<sup>[1]</sup>

100 x 308 x 274.8 mm (3.9 x 12.1 x 10.8 inches)

#### Packaging Dimensions (WxDxH)

195 x 390 x 500 mm (7.7 x 15.4 x 19.7 inches)

#### Weight<sup>[2]</sup>

Around 4.5 kg (9.9 lbs)

#### Packaging Weight

Around 6.35 kg (14 lbs)

#### Case Color

Raven black

#### Bays

- 1x 2.5"/3.5" disk bay
- 1x slim ODD bay

#### **Expansion Slots**

- One PCIe<sup>®</sup> 4.0 x16, low-profie (length < 167.65mm, height < 68.90mm)
- One PCIe<sup>®</sup> 3.0 x1, low-profie (length < 167.65mm, height < 68.90mm)
- Two M.2 slots (one for WLAN, one for SSD)

#### Stand

- Vertical stand
- No stand

#### Others

(Optional) Smart Cable (USB-A to USB-C®)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo<sup>®</sup> lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

## Network

#### **Onboard Ethernet**

Gigabit Ethernet, Realtek® RTL8111HN, 1x RJ-45, supports Wake-on-LAN

#### WLAN + Bluetooth®\*\*

- Realtek® Wi-Fi® 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card
- Intel<sup>®</sup> Wi-Fi<sup>®</sup> 6 AX201, 802.11ax 2x2 Wi-Fi<sup>®</sup> + Bluetooth<sup>®</sup> 5.1 (Bluetooth<sup>®</sup> 5.2 hardware ready), M.2 Card<sup>[1]</sup>
- Intel<sup>®</sup> Wi-Fi<sup>®</sup> 6E AX211, 802.11ax 2x2 Wi-Fi<sup>®</sup> + Bluetooth<sup>®</sup> 5.1 (Bluetooth<sup>®</sup> 5.3 hardware ready), M.2 Card<sup>[2]</sup>
- No WLAN and Bluetooth®

#### Notes:

[1] Bluetooth® 5.2 is hardware ready but may run at a lower version due to OS limitations.

[2] Bluetooth<sup>®</sup> 5.3 is hardware ready but may run at a lower version due to OS limitations.

#### **Ports**<sup>III</sup>

#### **Front Ports**

- 1x USB-C<sup>®</sup> 3.2 Gen 1 (support data transfer and 5V@3A charging)
- 2x USB 3.2 Gen 1
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

#### **Optional Front Ports**

1x card reader

#### **Rear Ports**

- 2x USB 2.0
- 2x USB 3.2 Gen 1 (one supports Smart Power On)
- 1x HDMI<sup>®</sup> 2.1 TMDS
- 1x DisplayPort<sup>™</sup> 1.4
- 1x VGA
- 1x Ethernet (RJ-45)
- 1x line-out (3.5mm)

#### Optional Rear Ports\*\*\*

- 2x USB 2.0
- 1x parallel
- 1x serial
- 1x 2nd serial
- None

#### Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

- USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
- USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4<sup>®</sup> 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt<sup>™</sup> 3/4: 40 Gbit/s.

# **SECURITY & PRIVACY**

## Security

#### Security Chip

Discrete TPM 2.0, TCG certified

#### Physical Locks

- (Optional) Smart Cable Clip
- Kensington<sup>®</sup> Security Slot<sup>™</sup>, 3 x 7 mm
- Padlock Loop

#### Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

#### Fingerprint Reader

No fingerprint reader

#### **BIOS Security**

- Supervisor password
- Power-on password
- Hard disk password
- Cover presence switch
- Individual USB port disablement
- Intel<sup>®</sup> BIOS guard
- Secure Wipe
- Self-healing BIOS
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)

## MANAGEABILITY

### **System Management**

#### System Management

Non-vPro®

## SERVICE

#### **Warranty**<sup>III</sup>

#### Base Warranty\*\*

- 1-year courier or carry-in service
- 1-year limited onsite service
- No base warranty

#### Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <u>https://smartfind.lenovo.com/</u>. To learn more details of warranty policy, please access <u>https://support.lenovo.com/warrantylookup/warrantypolicy</u>.

## ACCESSORIES

## **Bundled Accessories**

#### **Bundled Accessories**

- DP to DVI dongle
- DP to Dual DP dongle
- DP to HDMI® dongle
- DP to VGA dongle
- HDMI® to HDMI® dongle
- HDMI<sup>®</sup> to VGA dongle
- None

# **OPERATING REQUIREMENTS**

## **Operating Environment**

#### Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

#### **Relative Humidity**

- Operating: 20% to 80%
- Storage: 10% to 90%

#### Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

## CERTIFICATIONS

#### **Green Certifications**<sup>III</sup>

#### **Green Certifications**

- (Optional) ENERGY STAR<sup>®</sup> 8.0
- (Optional) EPEAT<sup>™</sup> Silver Registered<sup>[2]</sup>
- (Optional) EPEAT<sup>™</sup> Gold Registered<sup>[3]</sup>
- ErP Lot 3
- RoHS compliant
- TCO Certified

#### Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <u>https://compliance.lenovo.com</u>.
[2], [3] EPEAT<sup>™</sup> is registered where applicable, please visit <u>epeat.net</u> for registration status by country.

### **Other Certifications**

#### Other Certifications

- (Optional) TÜV Rheinland<sup>®</sup> Low Noise
- (Optional) TÜV Rheinland® Ultra Low Noise
- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel





intel



intel



intel



intel



intel